

*Submittal Data and Specifications*

**Switch**

**Material of Construction and Temperature Limitations:**


UV treated plastic body and switch. Switch recommended up to 140° F.

**Application:**

Manual motor controller for inside or outside installation.

**Shall have the following Features and Benefits:**

- Enclosure type NEMA 4X / IP66
- Rated up to 25 AMPs, 3 Pole
- 3 Phase or Single Phase, 50/60Hz
- Suitable as motor disconnect
- UL/CSA listed
- CE approved
- Provides for a lock in the off position for additional safety

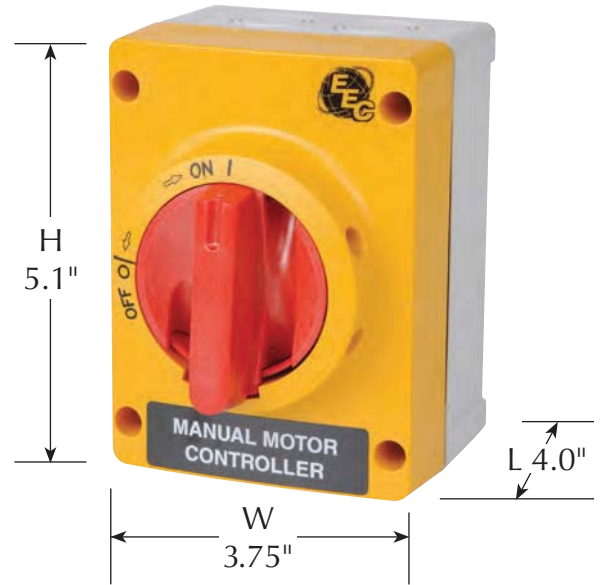

**Warranty:**

This equipment is warranted to be free from defects in material and workmanship for two years from date of original shipment.



PROJECT			ARCHITECT
CONTRACTOR	DATE	SUBMITTED BY	ENGINEER
SPECIFICATION			
RELATED FAN POSITION	MODEL #	QTY	NOTES